


NEW TRASDATA = PLUGIN 216


DIRECT CONNECTION


In order to connect to the ECU use the CABLE F32GN037C.
Make sure that the POWER led (red) on NEW TRASDATA is ON.
Do not use this connection with the DIMA connection.

COLORE FILO WIRE COLOUR	DESCRIZIONE DESCRIPTION
ROSSO RED	POSITIVO DIRETTO POWER BATTERY
ARANCIO ORANGE	POSITIVO SOTTO QUADRO POWER SWITCH ON
NERO BLACK	MASSA GND
GIALLO YELLOW	KLINE
VERDE GREEN	CAN LOW
BIANCO WHITE	CAN HIGH
GRIGIO GREY	POL4 BOOT
BLU BLUE	POL5 CNF1
VIOLA/GRIGIO PURPLE/GREY	TENSIONE PROG. PROG. VOLTAGE
MARRONE BROWN	RESET

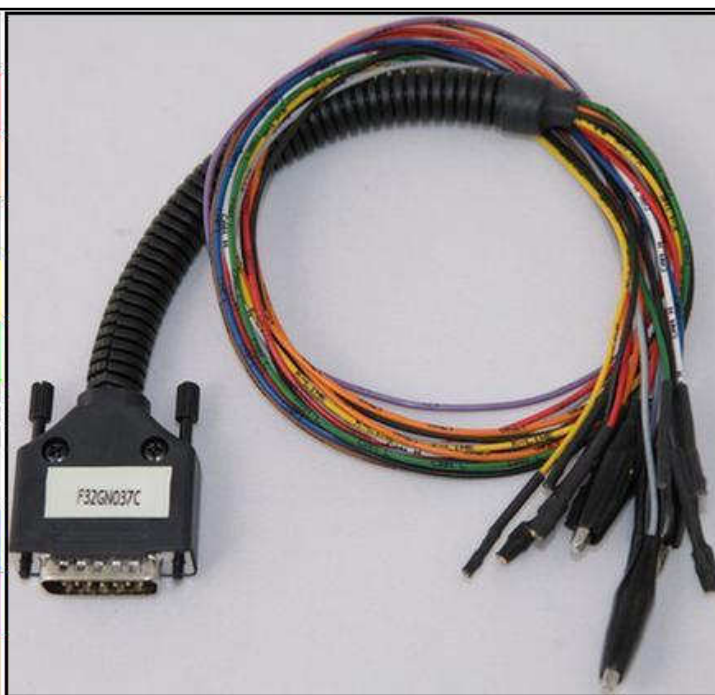

ECU CONNECTOR

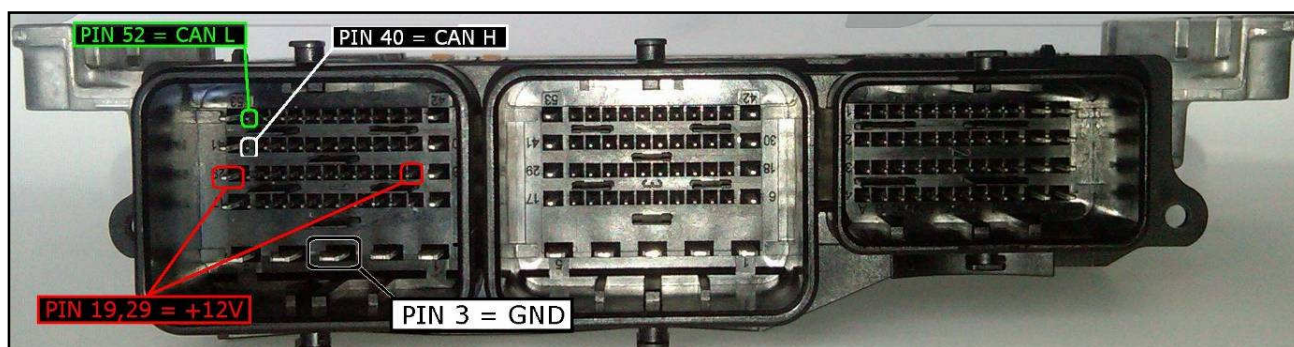

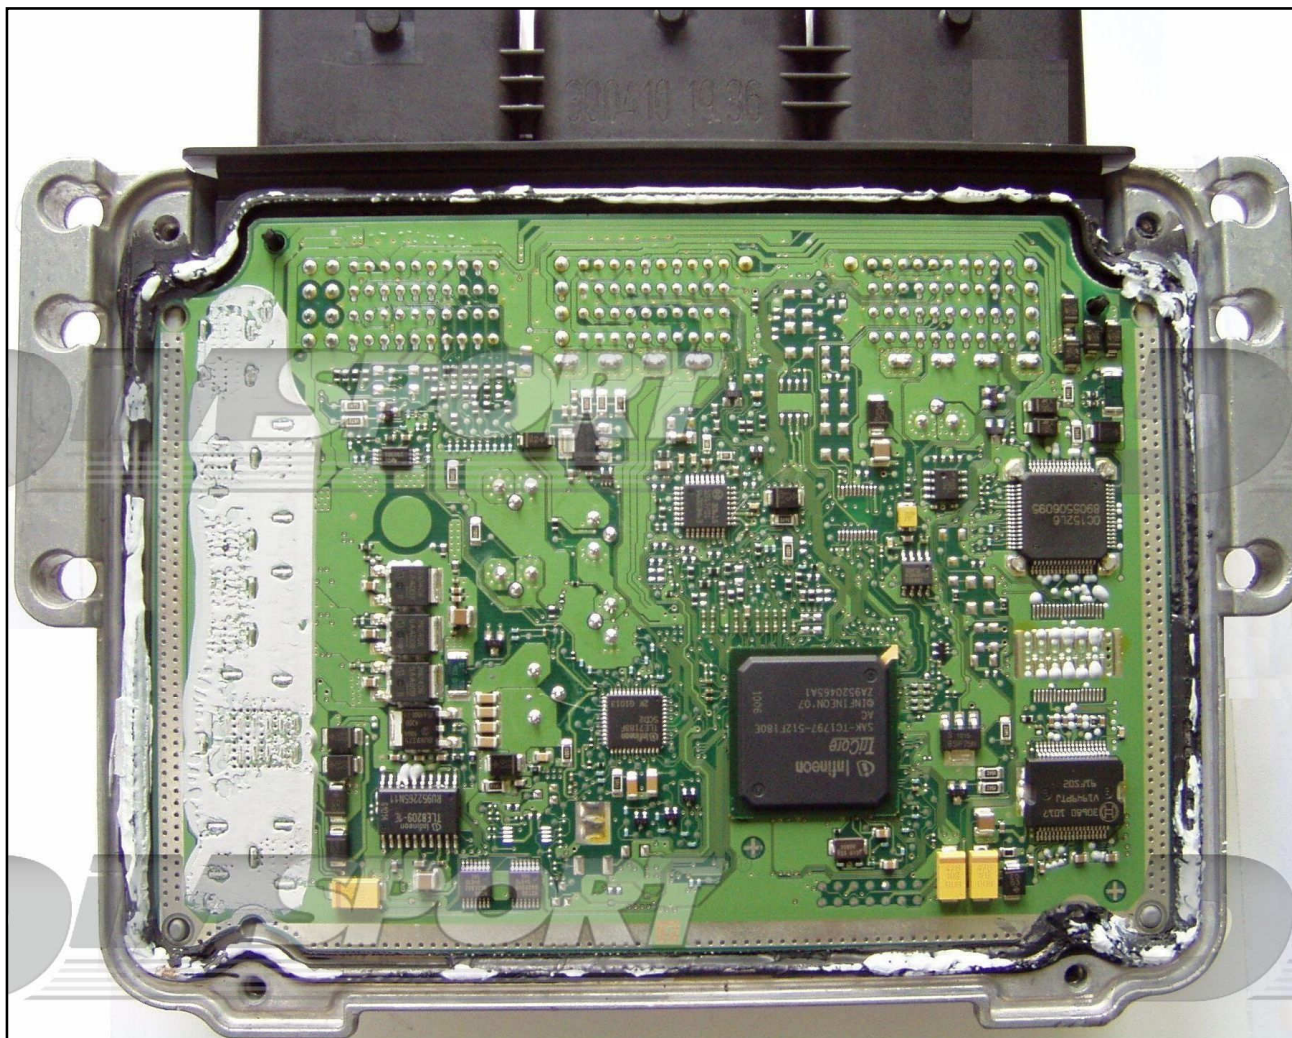TYPE 01

POL4 CONNECTION


Connect the GREY wire of the cable F32GN037C as described here below :

COLORE FILO WIRE COULOR	DESCRIZIONE DESCRIPTION
GRIGIO GREY	POL4 BOOT





DIMA CONNECTION

Connect the boot pin to the programming lay-by pin n. 10.

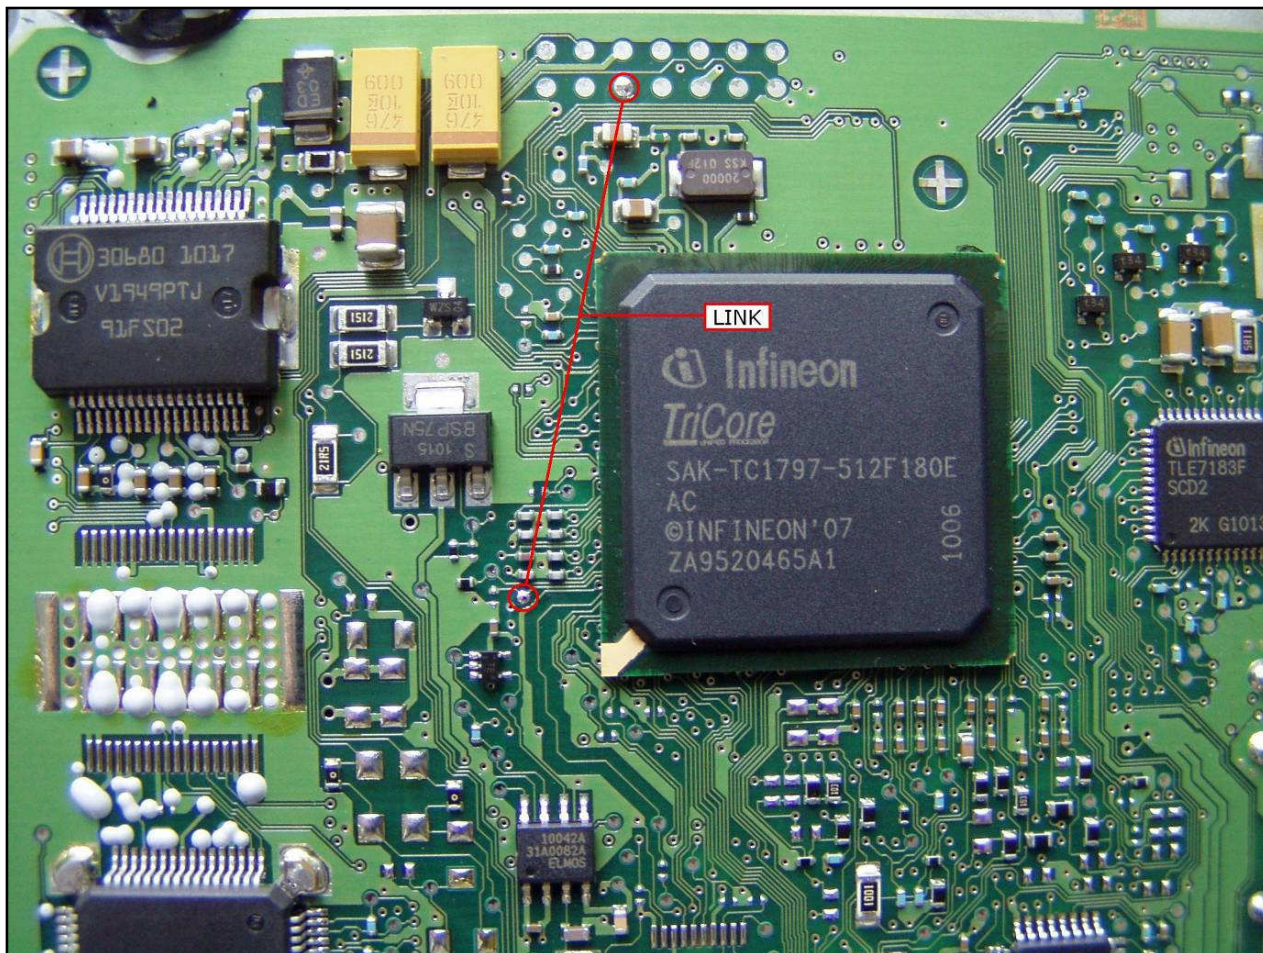

The following DIMA picture is merely indicative.

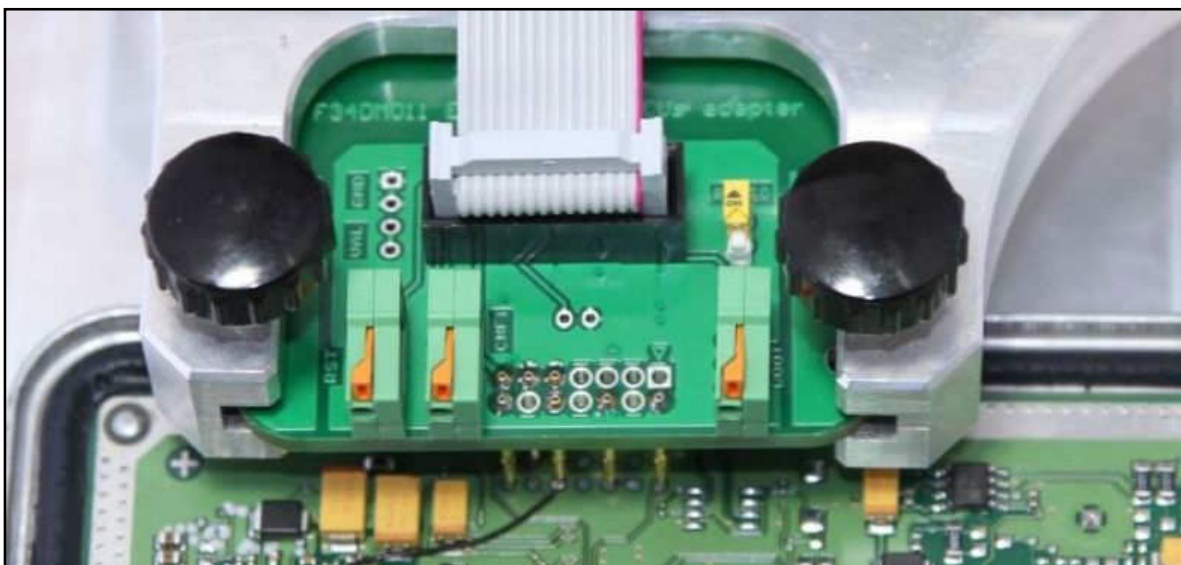

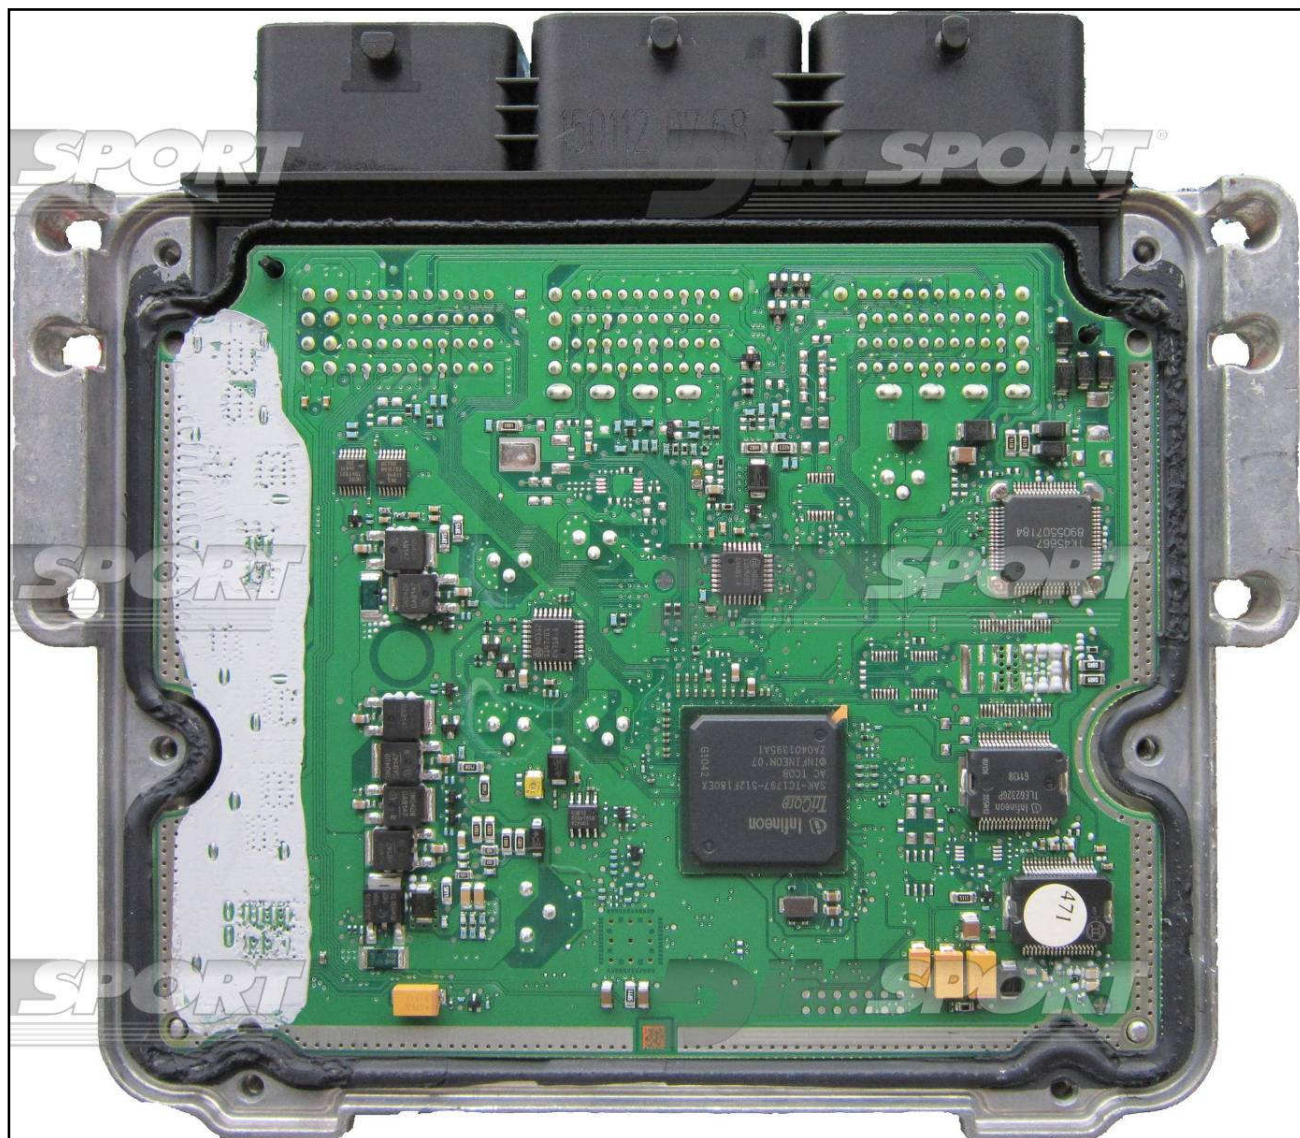
TYPE 02

POL4 CONNECTION

Connect the GREY wire of the cable F32GN037C as described here below :


COLORE FILO WIRE COULOR	DESCRIZIONE DESCRIPTION
GRIGIO GREY	POL4 BOOT

WARNING: the BOOT pin is under the Microprocessor side, it is NOT easy to get the pad without damaging the Microprocessor.

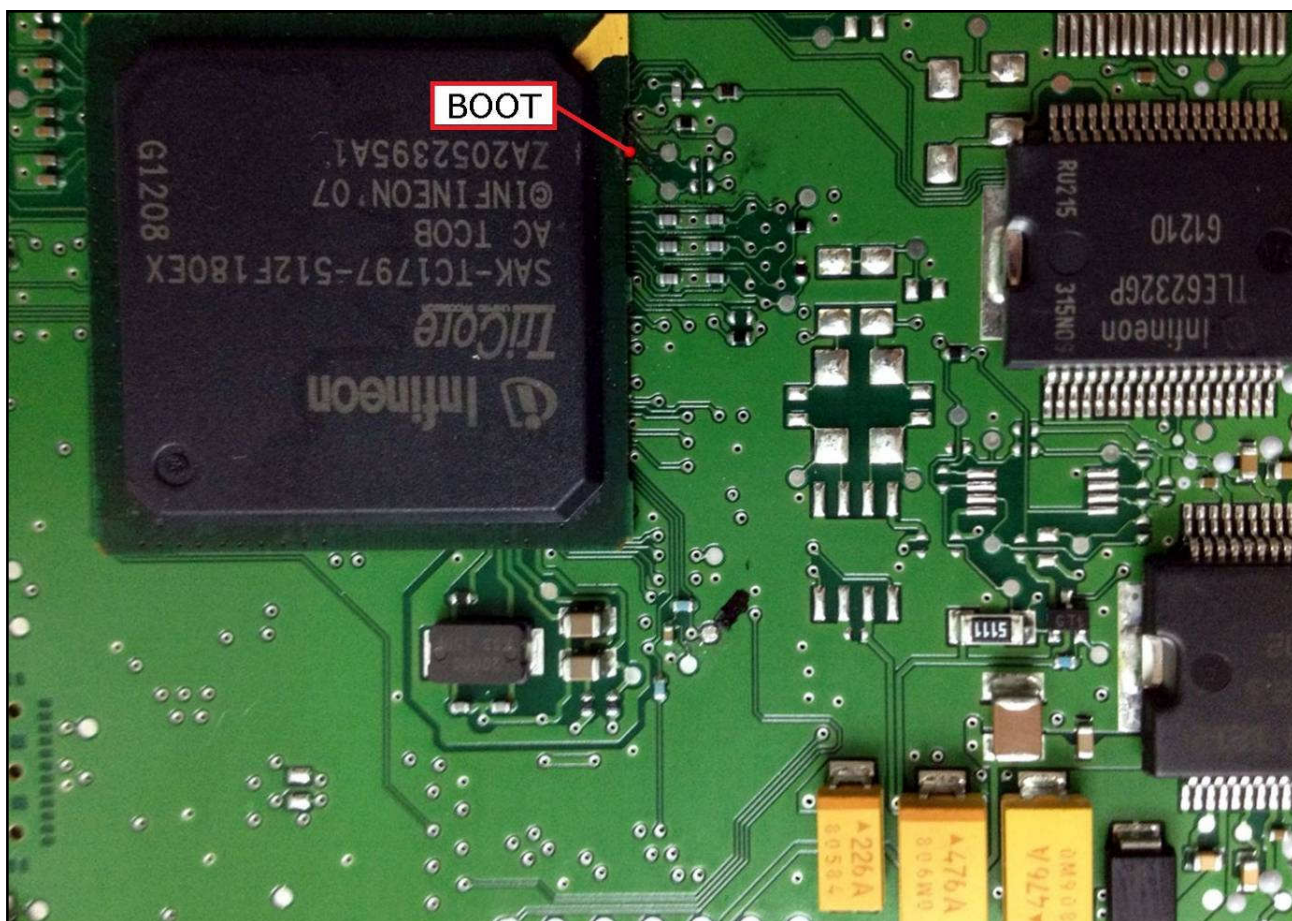

DIMA CONNECTION

Connect the boot pin to the programming lay-by pin n. 10.

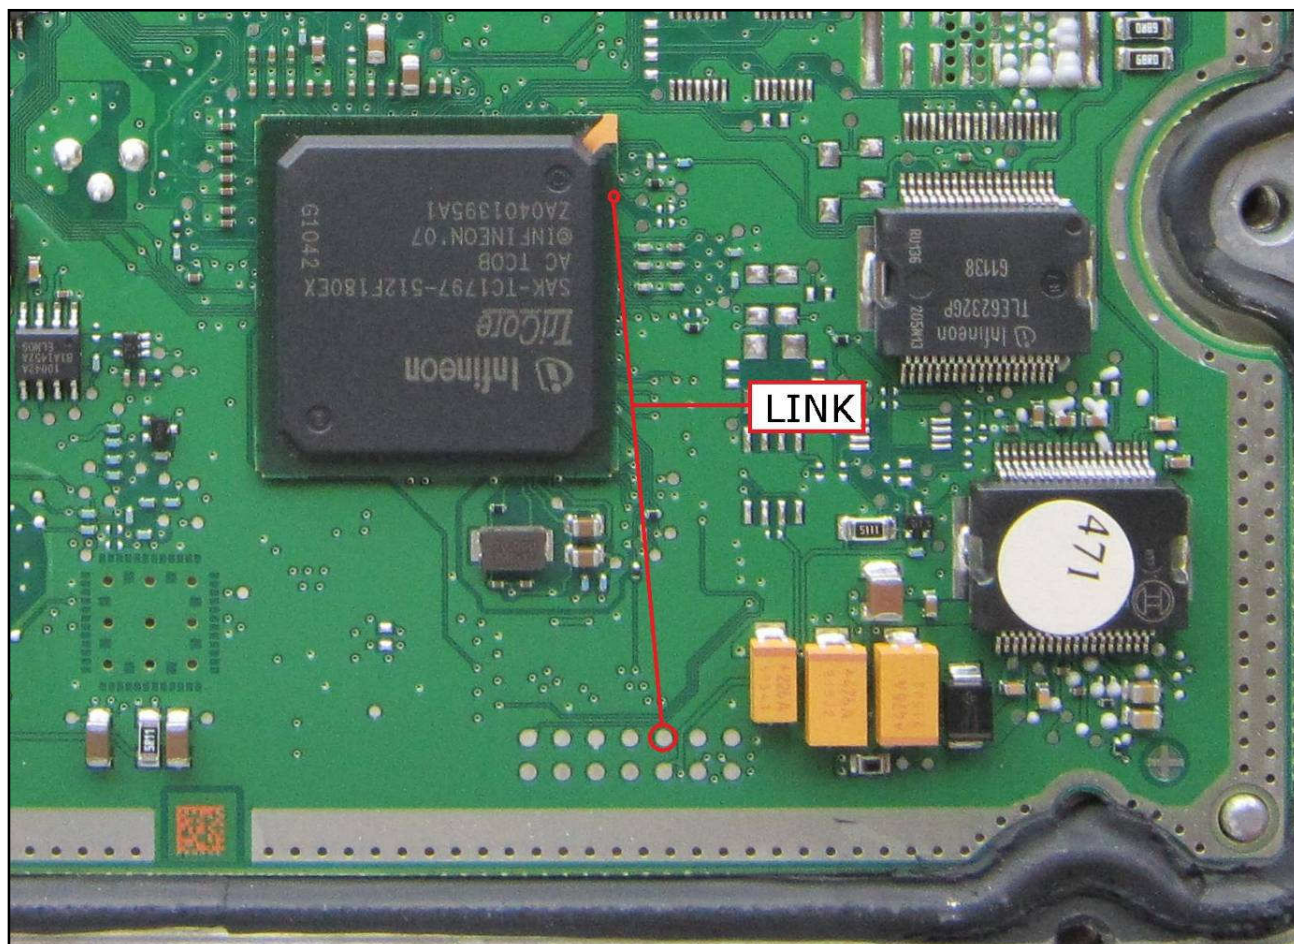

The following DIMA picture is merely indicative.

